

i-led TILE


+ Technical Specifications

PARAMETER	UNIT	VALUE
Tile Dimensions	mm	220 x 220
Tile Thickness	mm	2
Pixel Pitch	mm	62.5
Brightness	cd/m ²	400
Viewing Angle	deg.	≥120° (horizontal & vertical)
Colors		16.7 millions
Input Voltage (nominal)	VAC	110 to 240
Input Power	watts	7/module (max) ; 4/module (typical)
Lifetime	hours	>50,000
Ingree Protection	IP	IP6X
Operating Temperature	deg. C	-10° to 45°
Storage Temperature	deg. C	-20° to 60°
Overload/Overheat Protection		Included
Short Circuit Protection		Included
LED Configuration		SMD 3in1 RGB
LED Manufacturer		CREE

Subject to change without notice



Connection of Tile

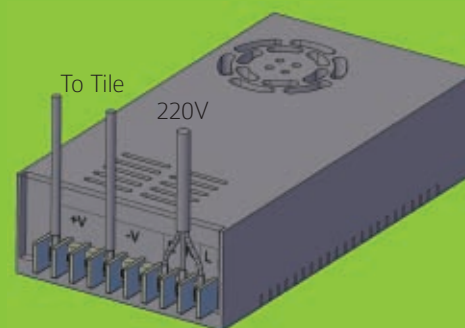

Connection of Power Supply



LED curtain wall display: 3385 LED tiles
LED tile dimension: 220 mm x 220 mm

